

SikaTile®

TILE AND STONE INSTALLATION SYSTEMS

PRODUCT GUIDE

SIKA SECURE

BUILDING TRUST

Sika®



MORE THAN 100 YEARS OF EXPERTISE

Sika has led the industry with revolutionary technology, innovative products and developing high-performance building materials for architects, builders, contractors and construction professionals worldwide. Sika's reputation for quality and reliability is illustrated through a comprehensive portfolio of technologies and solutions and our broad product range provides superior performance and value.

Sika' comprehensive range of SikaLevel® surface preparation products and SikaTile® waterproofing, sound control, anti-fracture, tile adhesives, tile grouts and functional accessory products are designed for use as integrated systems to achieve the optimum results.

Through high-touch, personal service, Sika offers professionals and end-users trusted solutions and expertise across a full line of innovative tile and stone installation systems. From liquid waterproofing membranes to fast-drying products and dustless dry mixes, you can trust Sika to have what you need to get the job done.

TABLE OF CONTENTS

4 Overview

5 Sika® Secure Build Up

6 Sika® Moisture Barriers

7 SikaLevel® Primers

8 SikaLevel® SkimCoat and Patching Materials

9 SikaLevel® Self-Leveling Underlayments

10 Waterproofing Materials

11 Crack Isolation Materials

12 Thin Set Adhesives - 300 Series

13 LHT Adhesives - 400 Series

14 High Performance Adhesives - 400 and 500 Series

15 Sound Control and Crack Isolation Membranes - 200 Series & 700 Series

16 Sanded and Unsanded Grouts - 800 Series

17 Modified Grouts - 800 Series

18 HIgh Performance Grouts - 800 Series

19 Mortar Beds, Construction Adhesives, and Accessories - 900 Series

20 Grout Color Guide

21 Grout Coverage Charts

22 Product Application Chart



Complete Installation Solutions

From substrate preparation to the final grout joint, Sika provides a fully integrated system of products designed to deliver reliable, high-performance tile and stone installations. The SikaTile portfolio combines advanced technology, proven performance, and decades of industry expertise to provide contractors, designers, and distributors with one of the most comprehensive installation systems available.

Surface Preparation: Every successful installation begins with a properly prepared substrate. Sika's surface preparation solutions include primers, patching compounds, mortar beds, self-leveling underlayments, and moisture mitigation systems designed to correct imperfections, improve substrate integrity, and create a stable foundation for tile and stone installations.

Moisture Management and Waterproofing: Sika offers a full range of moisture control and waterproofing solutions designed to protect tile installations in wet and demanding environments. Both liquid-applied and fabric waterproofing membranes, vapor control systems, and waterproofing accessories work together to help manage moisture, prevent water intrusion, and maintain long-term system performance.

Crack Isolation and Uncoupling: Substrates naturally move and crack over time. SikaTile crack isolation membranes and uncoupling mat systems are engineered to absorb substrate movement and prevent stress from transferring into the tile assembly. These systems help protect installations from cracking, debonding, and costly failures.

Mortars and Adhesives: SikaTile polymer-modified mortars and specialty adhesives are formulated for a wide range of installation requirements, including large and heavy tile, rapid-setting applications, and demanding commercial environments. Many SikaTile mortars feature innovative DUST-LESS Technology, producing significantly less airborne dust while delivering improved workability, creamier consistency, and easier troweling.

Grouts and Joint Solutions: Sika offers a complete family of grout solutions including traditional cement grouts, high-performance polymer-modified formulations, ready-to-use, and 100 percent solids epoxy systems. With a wide range of colors in all products and advanced performance technologies, SikaTile grouts provide durable, stain-resistant joints for residential, commercial, and industrial installations.

Additives and Construction Adhesive: Specialized additives and construction adhesives further enhance system performance by improving bond strength, adjusting cure times, and providing versatile solutions for demanding installation conditions.



Quality, Innovation, and Support

Behind every Sika product is a global commitment to quality, research, and technical expertise. Sika invests heavily in research and development across multiple international laboratories to deliver innovative installation technologies and sustainable solutions that meet the evolving needs of the construction industry.

Through dedicated technical service, industry training, and close collaboration with contractors and distributors, Sika delivers trusted expertise and dependable system solutions across the entire tile and stone installation process.

SIKA SECURE

System Warranties: Sika stands behind its products with comprehensive product and system warranties designed to provide confidence and peace of mind. When installed as part of a SikaTile system, these solutions are supported by proven performance, and the reliability professionals expect from a global leader in construction technologies.

SikaTile® Tile and Stone Installation Build Up

The SikaTile® Secure System illustrates a complete installation solution designed to address real-world jobsite challenges. From moisture mitigation and surface preparation to underlayments, patching compounds, adhesives, and grouts, Sika provides an integrated system of products that work together to deliver reliable, high-performance tile and stone installations.


SikaTile® Grouts
- SikaTile®-800 Sanded Grout
- SikaTile®-800 Unsanded Grout
- SikaTile®-815 Secure Grout
- SikaTile®-825 Epoxy Grout
- SikaTile® Ultima Grout
- SikaTile®-885 Secure Silicone Caulk

SikaTile® Adhesives
- SikaTile®-300 Set
- SikaTile®-305 Pro Set
- SikaTile®-310 Premium Set
- SikaTile®-350 Flex Set
- SikaTile®-395 LHT Set
- SikaTile®-400 LHT Pro Set
- SikaTile®-425 LHT Secure Set Rapid
- SikaTile®-450 LHT Secure Set
- SikaTile®-475 LHT Premium Set
- SikaTile®-500 LHT Lite
- SikaTile®-550 Titan LHT Set
- SikaTile®-650 Type 1 Premium Adhesive

SikaTile® Waterproofing
- SikaTile®-100 Moisture Guard
- SikaTile®-150 Moisture Guard Fabric Membrane

SikaLevel® & SikaTile® Underlayments
- SikaLevel®-125
- SikaLevel®-225
- SikaLevel®-325
- SikaTile®-910 Floor Mud
- SikaTile®-920 Underlay C
- SikaTile®-925 Underlay RS

Sika® Moisture Barrier
- Sika® MB
- Sika® MB EZ Rapid

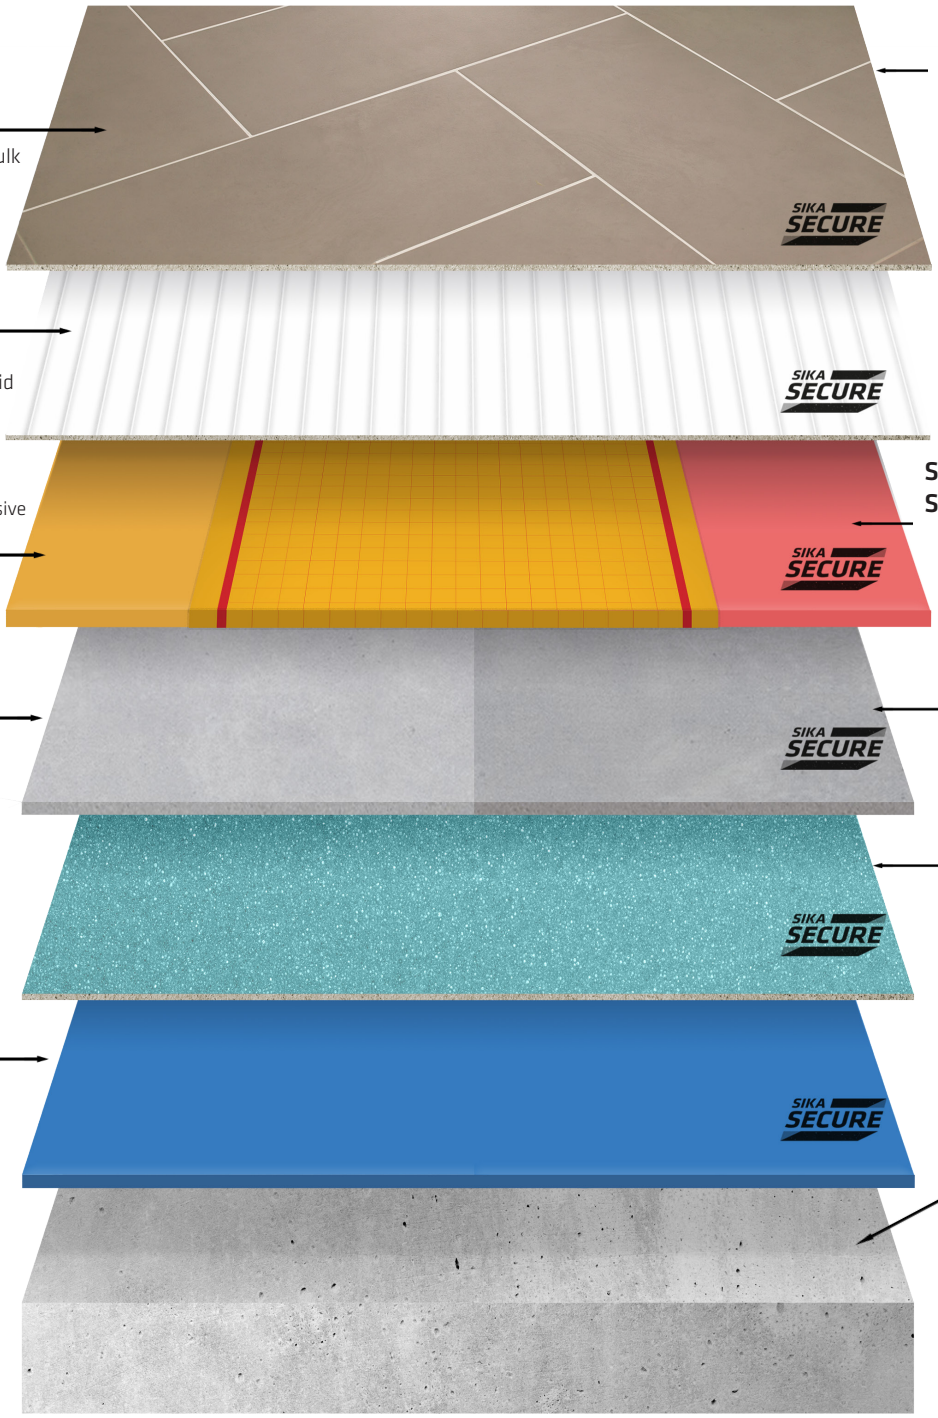

Floor Coverings
- Brick and Thin Brick
- Terrazzo
- Porcelain Tile
- Gauged Porcelain Tile (GPTP – T/S)
- Glass Tile
- Natural Stone
- Ceramic
- Mosaic
- Quarry Tile
- Cement Body Tile

SikaTile® Crack Isolation & Sound Control
- SikaTile®-200 Fracture Guard Rapid
- SikaTile®-225 Fracture Guard PNS
- SikaTile®-250 Fracture Guard UCM
- SikaTile®-700 Sound Shield PNS

SikaLevel® Patches
- SikaLevel® SkimCoat
- SikaLevel®-025 Patch

SikaLevel® Primers
- SikaLevel®-02 EZ Primer (For non-porous substrates)
- SikaLevel®-01 Primer Plus (For porous substrates)

Substrates
- Brick Masonry
- Cement Backer Board
- Cement Mortar Beds
- Cement Plaster
- Cement Terrazzo
- Ceramic Tile and Stone
- Concrete
- Concrete Masonry
- Cutback Adhesives
- Exterior Grade Plywood
- Gypsum Wallboard
- Radiant Heat
- Rubber Coverings
- SikaLevel® Patches
- SikaLevel® Underlayments
- SikaTile® Membranes
- Vinyl Tile

Sika® Moisture Barriers

Sika® MB and Sika® MB EZ Rapid are solvent-free, low-viscosity moisture barriers for use under ALL flooring products, including tile and stone, wood, carpet, vinyl, LVT, self-leveling underlayments, floating floors, and other flooring systems that require protection from subfloor moisture.

Sika® MB



Moisture barrier, substrate consolidator and adhesion promoter two-component epoxy

- Water Vapor Permeability: 0.06
- Reduction in adhesive consumption
- Cures in 8 hours at 73°F

Tools: Nap roller **Color:** Blue

Packaging: 2.64 US. gal. pail

Coverage per pail:
- Moisture barrier: 250 - 300 sq.ft.
- Adhesion promoter or substrate consolidator: 400 - 450 sq.ft

Moisture Limitations:
- 100% RH, #25 CC, 6% Tramex

Sika® MB EZ Rapid



One-component, rapid-drying, polyurethane resin, moisture mitigation system and substrate solidifier

- 1 hour dry time
- Excellent adhesion promoter
- Low viscosity
- Compatible for glue-assist applications

Tools: Nap roller **Color:** Blue

Packaging: 2.5 US. gal. pail

Coverage:
- 1 Coat: 1000 sqft per jug - 400 sqft per gallon
- 2 Coat: 500 sqft per jug - 200 sqft per gallon


Moisture Limitations:
- 1 Coat: 93% RH, #12 CC
- 2 Coats: 98% RH, #18 CC

MOISTURE PROTECTION



WHERE TO USE
- Up to 100% RH, 25 lbs calcium chloride and under 6% Tramex
- Under any flooring system that requires protection from moisture

SUBSTRATE CONSOLIDATION

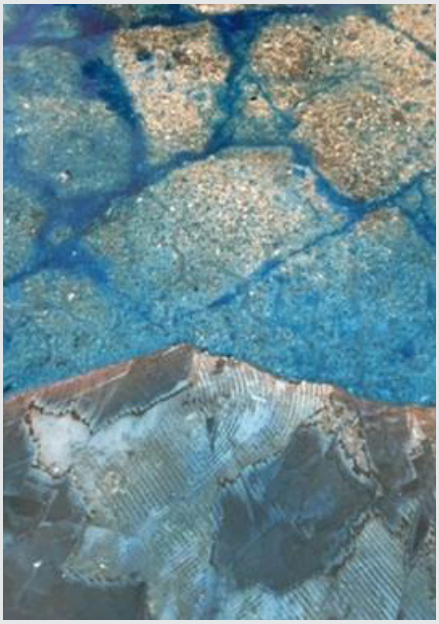

WHERE TO USE
- On weak or delicate substrates
- On old substrates
- Gypsum-based subfloors

ADHESION PROMOTION



WHERE TO USE
- Over old adhesive and residues
- Encapsulating asphalt based substrates including cutback
- Over old substrates

Surface Preparation - Primers, Skim, Ramp

SikaLevel® primers can be used on a wide range of substrates before the application of Sika® self-leveling cementitious products. These primers can reduce the absorbency of the substrates and improve the adhesion between the underlayment and the substrate.

SikaLevel®-01 Primer Plus



Primer for porous substrates. Reduces absorbency of the substrate

- Broom applied
- Reduces pinholes
- 10 minute dry time on concrete
- Can be diluted with water

Color: White
Tools: Broom or brush

Coverage: 600-1000 sq.ft. dilution 1:3
Packaging: 1 US. gal. jug or
5 US. gal. jug

SikaLevel®-02 EZ Primer



Primer for non-porous substrates. Provides optimum adhesion on tight substrates

- Nap roller applied
- Good skid resistant properties
- Short waiting time
- No dilution required

Color: Mint
Tools: Nap roller

Coverage: 350 - 500 sq.ft.
Packaging: 1 US. gal. pail





SikaTile®-101 Overspray

Underlayment Primer and Bonding Agent



- Use as a primer over gypsum underlayment
- Enhances adhesive bond
- Reduces porosity to allow proper open time for adhesive
- Add strength and durability to underlayment

Color: White
Tools: Nap roller

Coverage: 250-300 sq.ft.
Packaging: 3.5 US. gal. pail



SkimCoat and Patch

SikaLevel®-025 Patch



Rapid Setting, Polymer Modified, Cement-based Patching Compound

- For patching and leveling from featheredge to 1/2”
- Foot traffic in 30 to 60 minutes
- Apply over difficult substrates

Coverage: 25-30 sqft. at 1/8” thickness
Packaging: 25 lb. bags

SikaLevel® SkimCoat



Fast setting, reprofiling mortar for use in feather edge applications before sensitive floor coverings

- Easy to use
- High adhesion
- No moisture limitations

Coverage: Approx. 110 sq.ft./bag
Packaging: 4 x 10 lb. bags/packs

Sika® Latex R



Acrylic Latex Bonding Agent and Admixture for Portland Cement Mortars and Grouts

- Concrete/Mortar/Grout/etc. containing SikaLatex® R exhibits improved adhesion
- Increased adhesive strength of mortar/concrete when used as a bonding grout
- Increased resistance to freeze/thaw durability
- Does not produce a vapor barrier

Packaging: 1 and 5 gal. jugs
For use with: SikaLevel®-025 Patch
SikaTile®-300 Set

As admixture/mixing solution:
With mixer running, add SikaLatex® R and then the cement based product. Replace the amount of water recommended by the product. Do not dilute with water.



Self-Leveling Underlayments

SikaLevel®-125



Durable self-leveling underlayment

- Economical
- Levels new and old floors

Coverage: 21 sq.ft. at 1/4" per bag
Packaging: 50 lb. bags

SikaLevel®-225



Premium self-leveling underlayment

- Superior flow
- Long workability
- Quick turnaround

Coverage: 28 sq.ft. at 1/4" per bag
Packaging: 55 lb. bags

SikaLevel®-325



High performance self-leveling underlayment

- Interior & exterior use
- Deep pour
- High strength

Coverage: 26 sq.ft. at 1/4" per bag
Packaging: 55 lb. bags

	Application Thickness		
	Minimum	Maximum	With Aggregate
SikaLevel®-125	1/8''	1''	2''
SikaLevel®-225	1/16''	2''	3''
SikaLevel®-325	1/8''	3"	4"

	Floor Covering Times		Compressive Strength
	Non Moisture Sensitive	Moisture Sensitive	28 Days
SikaLevel®-125	2 - 3 hours	1 - 3 days	4,000 psi
SikaLevel®-225	3 hours	16 hours	4,500 psi
SikaLevel®-325	4 hours	24 hours	5,300 psi



Waterproofing - 100 Series



SikaTile®-100 Moisture Guard

Fast-Drying Elastomeric Waterproof and Crack Isolation Membrane

- For use in areas that require positive waterproofing
- Crack Isolation up to 1/8"
- Fast drying, foot traffic in 2 – 4 hours
- Flood test after 4 – 6 hour cure

Specifications: ANSI: A118.10 and A118.12
Coverage: 50 sqft. per gal.
Packaging: 1 and 3.5 gal. pails

MOLD + MILDEW RESISTANT

FAST DRYING

ANSI A118.10 A118.12 APPROVED



SikaTile®-150 Moisture Guard Fabric Membrane

Flexible, Sheet-Applied Waterproofing Membrane


- Lightweight, polyethylene sheet with nonwoven, polypropylene fabric
- Consistent thickness with minimal surface elevation
- Easy to handle and cut, providing rapid installation

Specifications: ANSI: A118.10 and A118.12
Packaging: 39.4" x 16.4' (1 m x 5 m) roll (54 sq. ft. / 5m2)
39.4" x 98.4' (1 m x 30 m) roll (323 sq. ft. / 30 m2)

WATERPROOF / IMPERMEABLE

INTERIOR + EXTERIOR

ANSI A118.10 A118.12 APPROVED

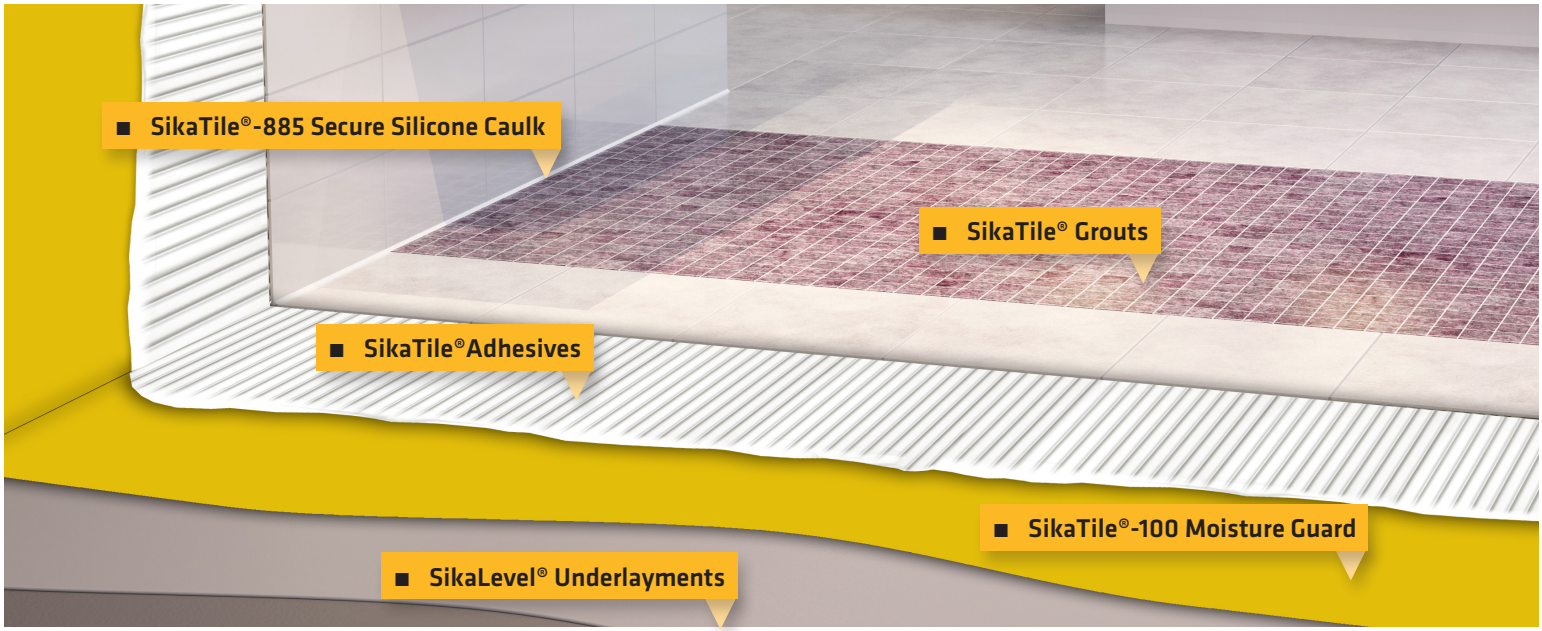

Crack Isolation - 200 Series



SikaTile®-200 Fracture Guard Rapid

Fast-Drying Elastomeric Crack Isolation Membrane

- For use on all sound common surfaces
- Crack Isolation up to 1/8"
- Excellent elongation will inhibit the transfer of cracks
- Antimicrobial for mold and mildew resistance at the substrate

Specifications: ANSI: A118.12
Coverage: 80 sqft. per gal.
Packaging: 1 and 3.5 gal. pails









SikaTile®-250 Fracture Guard FCM

Uncoupling, Crack Isolation and Waterproofing Membrane


- Lightweight, polyethylene sheet with 2 non-woven, polypropylene fabric layers
- Prevents transmission of in-plane substrate cracks up to 1/8" (3 mm)
- Uniform thickness with a thin profile and lay-flat technology

Specifications: ANSI: A118.10 and A118.12
Packaging: 39.4" x 32.8' (1 m x 10 m) roll (108 sq. ft. / 10m2)
39.4" x 98.4' (1 m x 30 m) roll (323 sq. ft. / 30 m2)







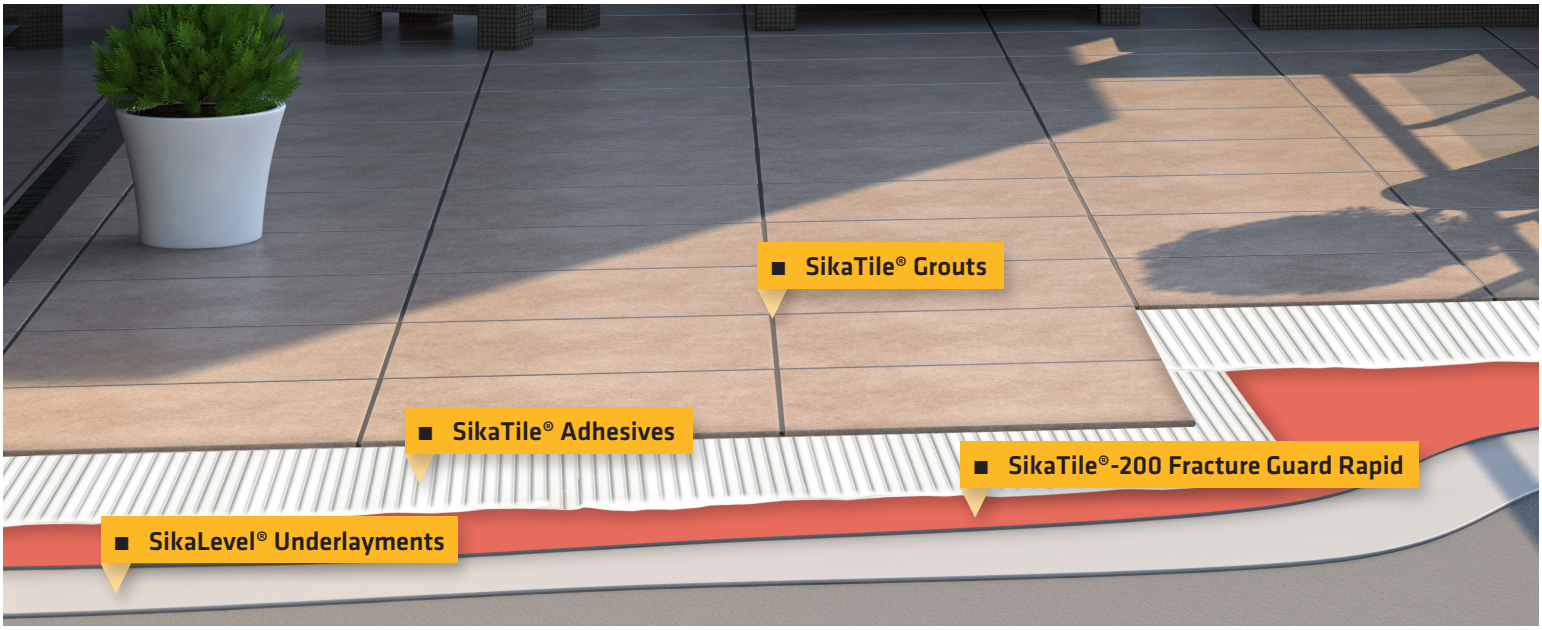

Thin Set Tile Adhesives - 300 Series



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

ANSI A118.4 A118.11 APPROVED

When mixed with Sika® Latex R

SikaTile®-300 Set

Standard Grade Non-Modified Thin Set Mortar

- For use with ceramic tile and dimensionally stable natural stone
- Can be used over plywood substrates when mixed with Sika Latex R

Specifications: ANSI: A118.1 when mixed with water (A118.4 and A118.11 when mixed with Sika® Latex R)
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: Gray and White



MOLD + MILDEW RESISTANT

INTERIOR + EXTERIOR

DUSTLESS TECHNOLOGY

ANSI A118.4 A118.11 APPROVED

SikaTile®-305 Pro Set

Professional Grade Polymer Modified Thin Set Mortar

- For use with porcelain, ceramic tile, and dimensionally stable natural stone
- Good bond to cement and exterior-grade plywood surfaces

Specifications: ANSI: A118.4 and A118.11
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: Gray and White



SikaTile®-310 Premium Set

Premium Grade Polymer Modified Thin Set Mortar

- For use with porcelain, ceramic tile, and dimensionally stable natural stone
- High bond strengths to cement and exterior-grade plywood surfaces
- Longer working times

Specifications: ANSI: A118.4 and A118.11
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: Gray and White

MOLD + MILDEW RESISTANT | INTERIOR + EXTERIOR | DUSTLESS TECHNOLOGY | ANSI A118.4 A118.11 APPROVED



SikaTile®-350 Flex Set

Superior Grade Polymer Modified Thin Set Mortar

- Ideal for exterior vertical installations
- For glass, porcelain, ceramic tile and natural stone
- Adheres to non-absorptive surface

Specifications: ANSI: A118.15E, A118.4E, A118.11
ISO: 13007 - C2EP1
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: Gray and White

MOLD + MILDEW RESISTANT | DUSTLESS TECHNOLOGY | ANSI A118.11 and ANSI A118.15 C2EP1 ISO 13007



SikaTile®-395 LHT Set

Standard-Grade LHT Mortar

- For most standard floor and wall installations
- Supports large and heavy tile for flat, even installations

Specifications: ANSI: A118.15E, A118.4E, A118.11
ISO: 13007 - C2EP1
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: Gray and White

Available in select markets only.

MOLD + MILDEW RESISTANT | INTERIOR + EXTERIOR | ANSI A118.11 and ANSI A118.15 C2EP1 ISO 13007

LHT Adhesives - 400 Series



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

ANSI A118.4 C1 ISO 13007

SikaTile®-400 LHT Pro Set

Professional-Grade LHT Mortar

- For use with large and heavy tile and natural stone
- Non-slumping formula eliminates tile lippage
- May be applied up to 3/4" thick on horizontal applications

Specifications: ANSI: A118.4 **ISO:** 13007 - C1
Coverage: Refer to coverage chart on page 21
Packaging: 50-lb. bags
Colors: Gray and White



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

RAPID SETTING

ANSI A118.4F and ANSI A118.11F C2FP1 ISO 13007

SikaTile®-425 LHT Secure Set Rapid

Premium-Grade, Rapid-Setting, LHT Mortar

- Non-sag and slip resistance for large and heavy tile
- Ideal for time-critical residential and commercial applications
- Allows for grouting in 3 hours and open for traffic in 4 hours

Specifications: ANSI: A118.4F, A118.11F **ISO:** 13007 - C2FP1
Coverage: Refer to coverage chart on page 21
Packaging: 25-lb. bags
Colors: Gray and White



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

ANSI A118.4E and ANSI A118.11 C2EP1 ISO 13007

SikaTile®-450 LHT Secure Set

Premium-Grade LHT Mortar

- Non-sag and slip resistance for large and heavy tile
- May be applied up to 3/4" thick on horizontal applications
- Flowable properties reduce the need for back-buttering

Specifications: ANSI: A118.4E, A118.11 **ISO:** 13007 - C2EP1
Coverage: Refer to coverage chart on page 21
Packaging: 50-lb. bags
Colors: Gray and White



High Performance Adhesives - 400, 500 and 600 Series



MOLD + MILDEW RESISTANT

UP TO 50% MORE COVERAGE

SikaTile®-475 LHT Premium Set

High Performance Flexible LHT Mortar

- For use with large ceramic, porcelain, gauged porcelain, marble, granite, and natural stone
- Flexible adhesive, suitable for high traffic areas
- Superior transfer promotes full coverage for gauged porcelain tile panels

Specifications: ANSI: A118.15ET, A118.4ET, A118.11
ISO: 13007 - C2TES1P1
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: White

ANSI A118.11 and ANSI A118.15 C2TE S1P1 ISO 13007



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

LIGHTWEIGHT

SikaTile®-500 LHT Lite

Superior Grade Lightweight Flexible LHT Mortar

- Non-sag and slip resistance for LHTs
- Non-slumping formula eliminates tile lipage
- May be applied up to 3/4" (19 mm) thick on horizontal applications
- 30 lb. bag provides same coverage as a typical 50 lb. bag of mortar

Specifications: ANSI: A118.15*, A118.4, A118.11
Coverage: Refer to coverage chart on page 21
Packaging: 30 lb. bags
Colors: Gray and White

* meets most requirements for A118.15

ANSI A118.11 A118.15* APPROVED



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

INTERIOR + EXTERIOR

SikaTile®-550 Titan LHT Set

Superior Grade LHT Mortar for Extra Large Tile and Stone

- Non-sag formula for large and heavy tile and stone in wall applications
- Non-slump formula for large and heavy tile and stone on floor applications
- May be applied up to 3/4" (19 mm) thick on horizontal applications
- Ideal for gauged thin porcelain tile panels and slabs

Specifications: ANSI: A118.15*, A118.4, A118.11
Coverage: Refer to coverage chart on page 21
Packaging: 50 lb. bags
Colors: Gray and White

* meets most requirements for A118.15

ANSI A118.11 A118.15* APPROVED



SikaTile®-650 Type 1 Premium Adhesive

Premium Tile Adhesive

- For standard wall, floor and countertop installations
- Excellent grab, ideal for tiles up to 12" x 12" (30 x 30 cm)
- Ready to use, smooth, easy to trowel

Specifications: ANSI: A136.1, Type 1 standards
Packaging: 1 and 3.5 gal. pails
Color: White

ANSI A136.1 TYPE 1 APPROVED

Sound Control and Crack Isolation Membranes - 200 & 700 Series



ANSI A118.12 APPROVED | MOLD + MILDEW RESISTANT | CRACK ISOLATION UP TO 3/8"

SikaTile®-225 Fracture Guard PNS

40 mil Peel and Stick Crack Isolation Sheet Membrane

- Crack isolation up to 3/8"
- Reduces Sound Transmission
- Moisture Vapor Barrier up to 5 lbs. per 1,000 sqft. in 24 hours
- Exceeds ANSI A118.12

Specifications: ANSI: A118.12
Coverage: 225 sqft. (3 ft. x 75 ft)
Packaging: 1: 40 mil roll per box
Colors: White




ANSI A118.12 APPROVED | MOLD + MILDEW RESISTANT | CRACK ISOLATION UP TO 3/8" | SOUND ABSORBING

SikaTile®-700 Sound Shield PNS

90 mil Peel and Stick Sound Control and Crack Isolation Sheet Membrane

- Crack isolation up to 3/8"
- Reduces Sound Transmission
- Moisture Vapor Barrier up to 5 lbs. per 1,000 sqft. in 24 hours
- Exceeds ANSI A118.12

Specifications: ANSI: A118.12
Sound Control: 71 IIC, 66 STC on a 8" concrete slab with a gypsum drywall ceiling
50 IIC, 57 STC on a 8" concrete slab with no acoustic ceiling
Coverage: 100 sqft. (3 ft. x 33 ft)
Packaging: 1: 90 mil roll per box
Colors: White

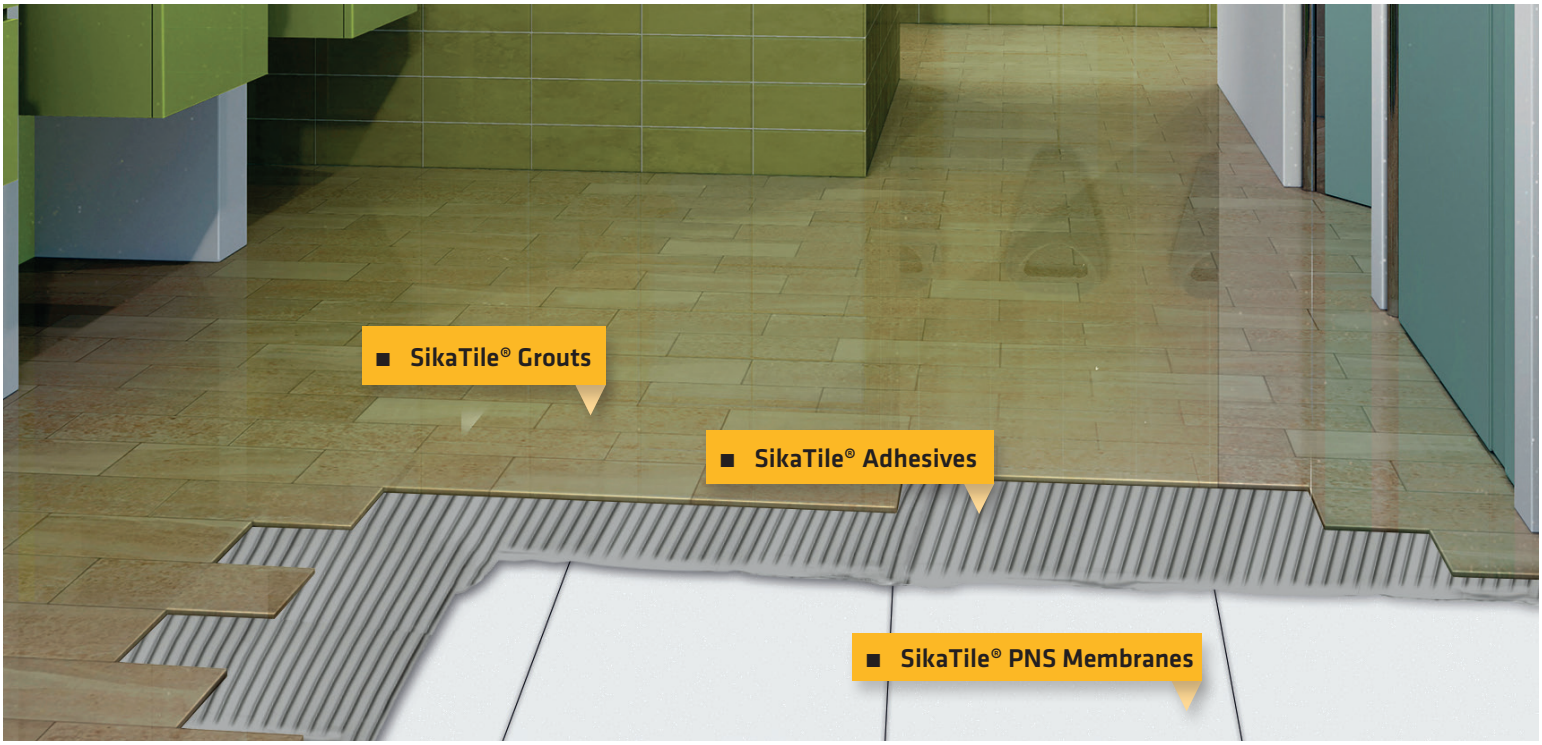

Sanded and Unsanded Grouts - 800 Series



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

ANSI A118.6 APPROVED

SikaTile®-800 Sanded Grout

Premium, Polymer-Modified Portland Cement Sanded Grout

- Polymer modified for hard, durable, professional results
- Stain resistant and color consistent
- For 1/8" (3 mm) to 1/2" (13 mm) grout joints
- Easy mixing; just add water – no additives required

Specifications: ANSI: A118.6
Coverage: Refer to coverage chart on page 21
Packaging: 25-lb. bags
Colors: 18 colors (refer to color chart)



MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

ANSI A118.6 APPROVED

SikaTile®-800 Unsanded Grout

Premium, Polymer-Modified Portland Cement Unsanded Grout

- Polymer modified for hard, durable, professional results
- Stain resistant and color consistent
- For 1/16" (1.5 mm) to 1/8" (3 mm) grout joints
- Easy mixing; just add water – no additives required

Specifications: ANSI: ANSI: A118.6
Coverage: Refer to coverage chart on page 21
Packaging: 10-lb. boxes
Colors: 18 colors (refer to color chart)



SikaTile®-885 Secure Silicone Caulk

High-Performance Hybrid Silicone Adhesive & Sealant

- For filling joints where tile abuts different surfaces or planes
- Formulated to match all SikaTile® grout colors
- Stain, mold and mildew resistant
- Paintable; for interior and exterior use

Coverage: Refer to coverage chart on page 21
Packaging: 10.3-fl. oz.cartridges
Colors: 32 colors (refer to color chart)

INTERIOR + EXTERIOR

MOLD + MILDEW RESISTANT

FILL JOINTS UP TO 1/4"

SikaTile®-895 Grout Sealer

Silicone Latex Sealer for Portland Cement Grouts



- Easy to apply
- Water-based formula
- Suitable for porous, absorbent masonry, clay, stone, marble and Portland cement grouts

Coverage:
Porous Surfaces: 200 – 400 sq. ft.
Dense or Polished Surfaces: 800 – 1,000 sq. ft.
Packaging: 1 gal. and 1 qt. jugs

INTERIOR + EXTERIOR

MOLD + MILDEW RESISTANT

Modified Grouts - 800 Series



SikaTile®-815 Secure Grout

High-Performance, Rapid-Setting, Polymer-Modified Grout


- Polymer modified for hard, durable, high-performing results
- Stain resistant, color consistent and efflorescence free
- For 1/16" (1.5 mm) to 1/2" (13 mm) grout joints
- Easy mixing; just add water – no additives required

Specifications: ANSI: A118.7
Coverage: Refer to coverage chart on page 21
Packaging: 25-lb bag; 10-lb bag
Colors: 32 colors (refer to color chart)

MOLD + MILDEW RESISTANT

DUSTLESS TECHNOLOGY

ANSI A118.7 APPROVED

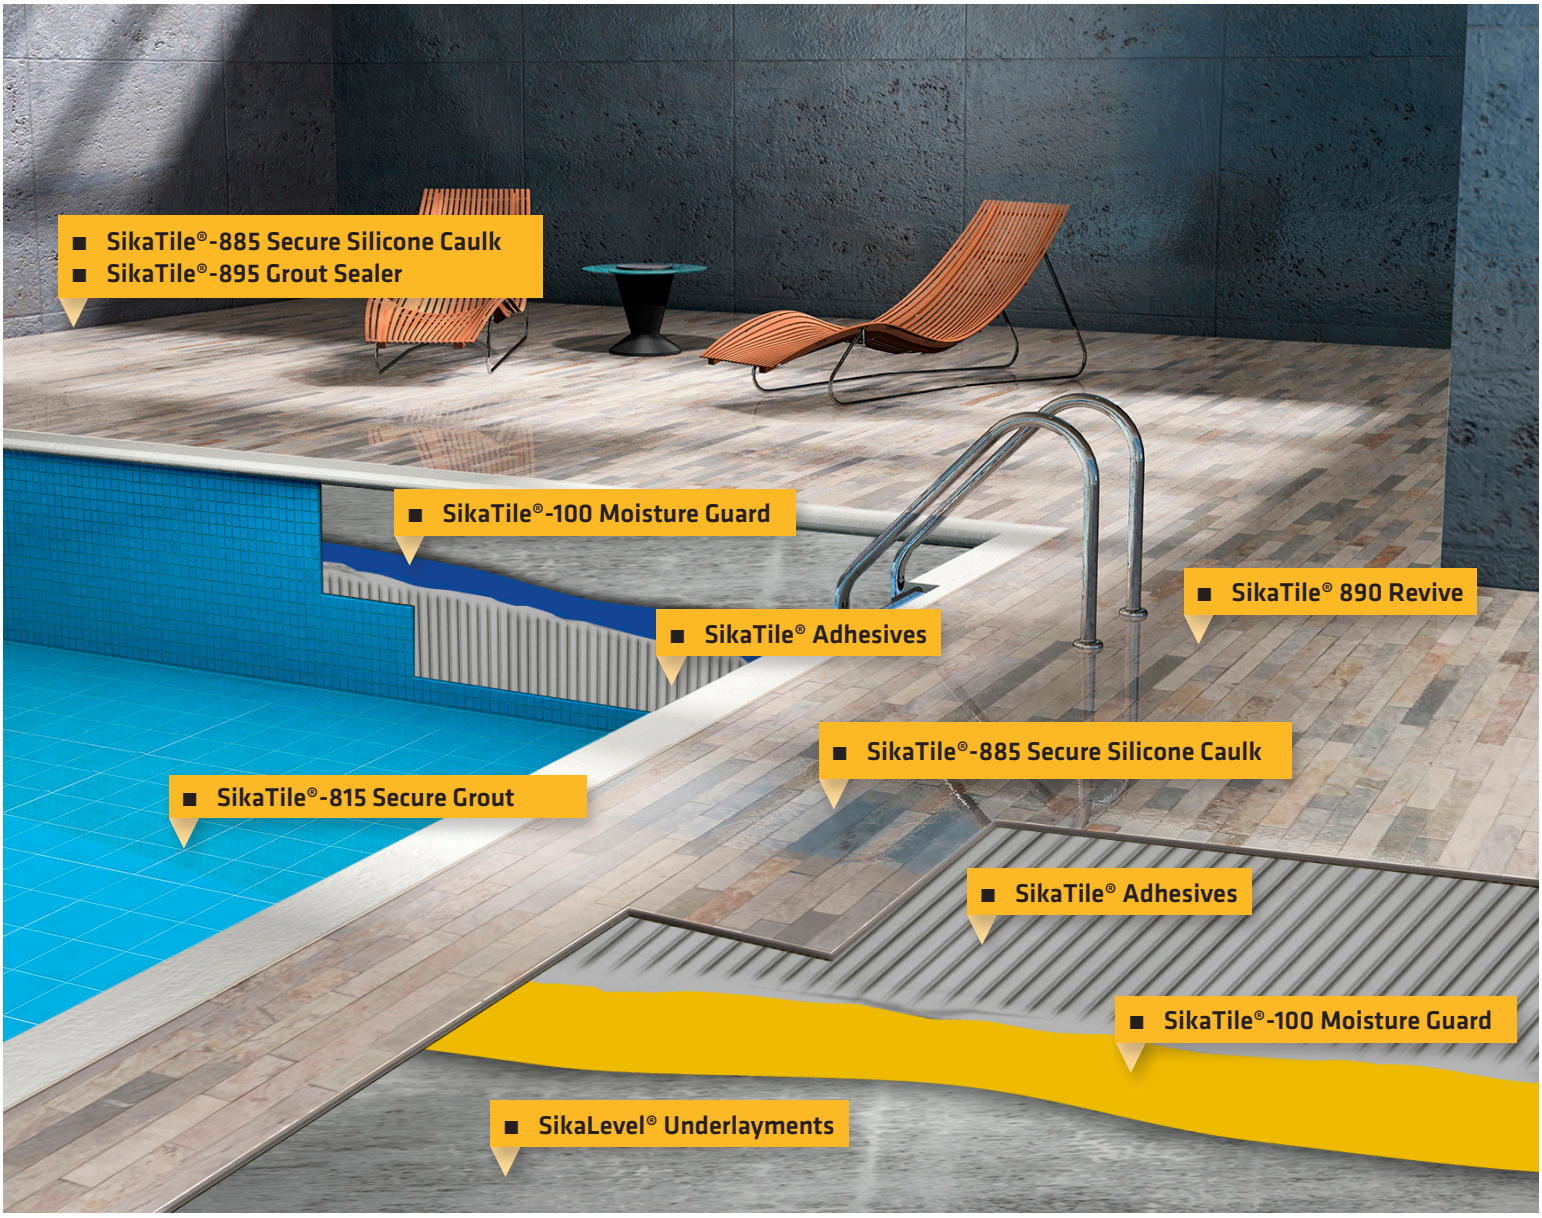

High-Performance Grouts - 800 Series



MOLD + MILDEW RESISTANT

A+B+C
3 COMP. IN 1

ANSI A118.3 APPROVED

SikaTile®-825 Epoxy Grout

Premium, 100%-Solids Epoxy Mortar and Grout

- Used for setting and grouting ceramic and quarry tile, pavers, mosaics
- Fill joint widths 1/8" to 3/8" (3.2 mm to 10 mm)
- Excellent setting material for moisture-sensitive and resin-backed stones
- High-strength mortar that is stain resistant, impermeable and shock resistant

Specifications: ANSI: A118.3
Coverage: Refer to coverage chart on page 21
Packaging: 2-gal. kit
Colors: 32 colors (refer to color chart)



MOLD + MILDEW RESISTANT

READY TO USE

INTERIOR + EXTERIOR


OPEN TO TRAFFIC

SikaTile® Ultima Grout

Professional-Grade Ready-To-Use Grout

- Superior-performance ready-to-use grout
- No mixing; easy to spread and clean
- Color consistent with no efflorescence
- Virtually stainproof; no sealing required
- For grout joints from 1/16" to ½" (1.5 mm to 12 mm)

Coverage: Refer to coverage chart on page 21
Packaging: 1-gal. pail
Colors: 32 colors (refer to color chart)

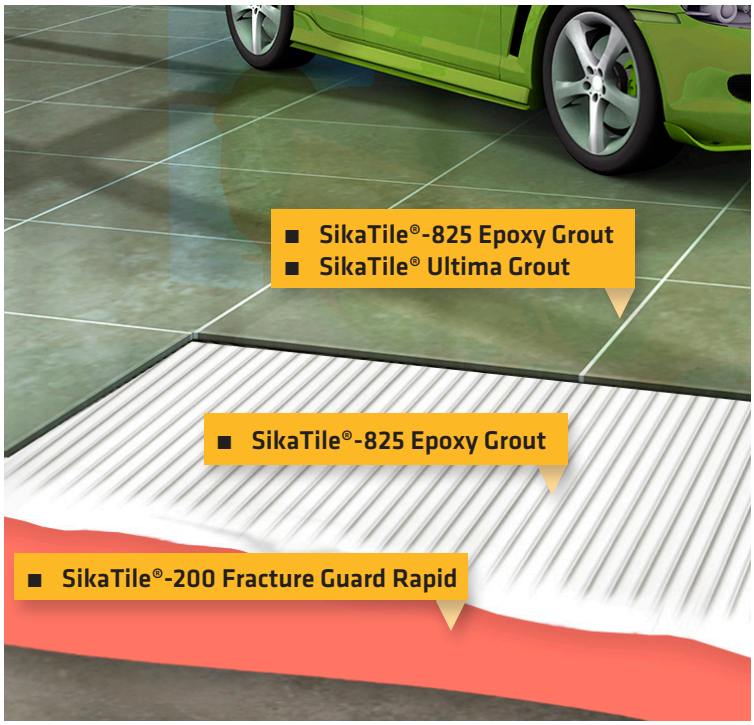

SikaTile®-890 Revive

Ready-To-Use, Water-Based, Urethane Acrylic Colorant and Sealer for Grout Joints



- For revitalizing or changing color of older sanded or unsanded grouts
- Protects against moisture and staining
- Formulated to match all SikaTile® grout colors

Coverage: Refer to coverage chart on page 21
Packaging: 8-fl. oz. bottle
Colors: 32 colors (refer to color chart)

INTERIOR + EXTERIOR

MOLD + MILDEW RESISTANT

Mortar Beds, Construction Adhesives, and Accessories - 900 Series

SikaTile®-900 Rapid Pack

Accelerator Additive for Portland Cement Mortars and Grouts



- Used to help speed up work times in Portland cement mortar
- Does not affect mortar performance characteristics
- More economical than standard rapid setting mortars

Packaging: 1 lb. bag
Color: White



Product/Productos	Weight/Peso	AVERAGE SETTING TIMES/ TIEMPO DE FRAGUADO PROMEDIO*		
		Without Pack / Sin Pack	With 1 Pack / Sin 1 Pack	With 2 Packs / Sin 2 Pack
SikaTile®-300 Set	50 lbs.	7 hours	2.5 hours	1 hour
SikaTile®-305, 310, 350, 395	50 lbs.	7 hours	3.5 hours	2.5 hours
SikaTile®-400, 450, 475	50 lbs.	7 hours	4.5 hours	2.5 hours
SikaTile®-500 LHT Lite	30 lbs.	7 hours	4.5 hours	2.5 hours
SikaTile®-800 Sanded and Unsanded Grout	10 and 25 lbs.	6 hours	1.5 hours	1 hour
SikaTile®-910 and 920 Underlayments	50 lbs.	8 hours	2 hours	1 hour

*Set times may vary based on ambient conditions / Los tiempos establecidos pueden variar según las condiciones ambientales

SikaTile®-910 Floor Mud

Pre-Blended Sand and Cement Mortar Mix




- Easy to install by screed or trowel
- Trowels to a smooth and uniform finish
- May be installed from ½" to 2"

Packaging: 50 lb. bag



SikaTile®-920 Underlay C

Polymer Modified Portland Cement Mortar Bed Underlayment

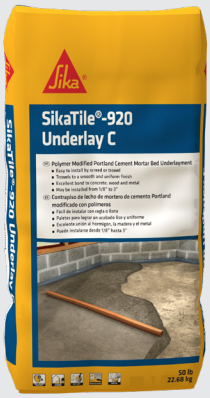

- Easy to install by screed or trowel
- Trowels to a smooth and uniform finish
- Excellent bond to concrete, wood and metal
- May be installed from 1/8" to 3"

Packaging: 50 lb. bag



SikaTile®-925 Underlay RS

Rapid-Setting Polymer Modified Portland Cement Mortar Bed Underlayment



- Easy to install by screed or trowel
- Trowels to a smooth and uniform finish
- Cures in 3 – 4 hours
- May be installed from ½" to 2"

Packaging: 50 lb. bag



SikaBond®-910

One-Component, Moisture Cured, Elastomeric Polyurethane Adhesive

- Versatile superior adhesion
- Remains permanently elastic
- Waterproof after cure



10.1 fl. oz. cartridge	Seals 12.4 lineal ft. of 1/2 x 1/4 in. bead
20 fl. oz. sausage	Seals 24 lineal ft. of 1/2 x 1/4 in. bead
29 fl. oz. cartridge	Seals 35 lineal ft. of 1/2 x 1/4 in. bead

SikaBond®-948 Low VOC

High-Strength, High-Solids Polyurethane Adhesive

- High green grab formula
- 1-2 hour firm set and quick dry capabilities
- Low VOC and low odor formulation



10.1 fl. oz. cartridge	Seals 12.4 lineal ft. of 1/2 x 1/4 in. bead
29 fl. oz. cartridge	Seals 35 lineal ft. of 1/2 x 1/4 in. bead

Sikaflex® 11FC

Glue Assist Polyurethane Adhesive

- Use to assist with nailing of flooring 5" and wider
- Apply using Cordon System or Serpentine System
- Highly elastic
- High strength durable adhesion



10.1 fl. oz. cartridge	Seals 12.4 lineal ft. of 1/2 x 1/4 in. bead
20 fl. oz. sausage	Seals 25 lineal ft. of 1/2 x 1/4 in. bead

SikaTile® Grout Solutions Color Collection

Products Included:

- **800:** SikaTile®-800 Sanded and Unsanded Grout
- **815:** SikaTile®-815 Secure Grout
- **825:** SikaTile®-825 Epoxy Grout
- **Ultima:** SikaTile® Ultima Grout
- **885:** SikaTile®-885 Secure Silicone Caulk
- **890:** SikaTile®-890 Revive



00525 Black Sapphire

00162 True Taupe

00038 Gray

00340 Shark Fin

00034 River Rock

00035 Natural Gray

00330 Dolphin

00325 Vintage Pewter

00320 Dove Gray

00032 Light Taupe

00012 Navajo White

00030 Silver

00312 Classic Silver

00310 Cloudy Gray

00125 Glacier

00010 Bright White

00120 Pearl

00111 Polar White

00121 Vanilla

00011 Snow White

00112 Pure White

00210 Blanched Almond

00017 Bone

00220 Sand Drift

00018 Cream

00021 Canvas

00230 Baja

00025 Tumbleweed

00153 Buckskin

00150 Santa Fe

00191 Terracotta

00175 Dark Chocolate

Color samples are a representation of manufactured colors, shade may vary under job site conditions, clean up, and tile type. Product specifications are subject to change.

Coverage Charts

SikaTile-800 Unsanded Grout Coverage in sqft. (m^2) per 10 lb. Bag (11.34 kg)*			
Tile Size	Grout Joint Width		
	1/16" (1.5 mm)	3/32" (2.4 mm)	1/8" (3 mm)
1" x 1" x 1/4" (25 x 25 x 6 mm)	42 (3.9)	29 (2.7)	23 (2.1)
2" x 2" x 1/4" (50 x 50 x 6 mm)	81 (7.5)	55 (5.1)	42 (3.9)
4" x 4" x 3/8" (100 x 100 x 10 mm)	105 (9.8)	71 (6.6)	54 (5.0)
6" x 6" x 3/8" (150 x 150 x 10 mm)	156 (14.5)	105 (9.8)	79 (7.3)
8" x 8" x 3/8" (200 x 200 x 10 mm)	207 (19.2)	139 (12.9)	105 (9.8)
12" x 12" x 3/8" (300 x 300 x 10 mm)	310 (28.8)	207 (19.2)	156 (14.5)
18" x 18" x 3/8" (150 x 610 x 10 mm)	464 (43.1)	310 (28.8)	233 (21.6)
24" x 24" x 3/8" (610 x 610 x 10 mm)	618 (57.4)	412 (38.3)	310 (28.8)
6" x 24" x 3/8" (150 x 610 x 10 mm)	249 (23.1)	167 (15.5)	126 (11.7)
12" x 24" x 3/8" (300 x 610 x 10 mm)	413 (38.4)	276 (25.6)	208 (19.3)

SikaTile®-800 Sanded Grout Coverage in sqft. (m^2) per 25 lb. Bag (11.34 kg)*				
Tile Size	Grout Joint Width			
	1/8" (3 mm)	1/4" (6 mm)	3/8" (10 mm)	1/2" (13 mm)
1" x 1" x 1/4" (25 x 25 x 6 mm)	58 (5.4)	34 (3.2)	26 (2.4)	22 (2.0)
2" x 2" x 1/4" (50 x 50 x 6 mm)	106 (9.8)	58 (5.4)	42 (3.9)	34 (3.2)
4" x 4" x 3/8" (100 x 100 x 10 mm)	136 (12.6)	71 (6.6)	49 (4.6)	39 (3.6)
6" x 6" x 3/8" (150 x 150 x 10 mm)	201 (18.7)	103 (9.6)	71 (6.6)	55 (5.1)
8" x 8" x 3/8" (200 x 200 x 10 mm)	265 (24.6)	136 (12.6)	93 (8.6)	71 (6.6)
12" x 12" x 3/8" (300 x 300 x 10 mm)	395 (36.7)	201 (18.7)	136 12.6)	103 (9.6)
18" x 18" x 3/8" (150 x 610 x 10 mm)	589 (54.7)	298 (27.7)	201 18.7)	152 (14.1)
24" x 24" x 3/8" (610 x 610 x 10 mm)	784 (72.8)	395 (36.7)	265 (4.6)	201 (18.7)
6" x 24" x 3/8" (150 x 610 x 10 mm)	318 (29.5)	162 (15.1)	111 (10.3)	85 (7.9)
12" x 24" x 3/8" (300 x 610 x 10 mm)	525 (48.8)	266 24.7)	179 16.6)	136 (12.6)

SikaTile® Ultima Grout Coverage in sqft. (m^2) per 1 gal. (3.79 L)*						
Tile Size	Grout Joint Width					
	1/16" (1.5 mm)	1/8" (3 mm)	3/16" (4.5 mm)	1/4" (6 mm)	3/8" (10 mm)	1/2" (12 mm)
2" x 2" x 1/4" (50 x 50 x 6 mm)	103 (9.6)	50 (4.7)	33 (3.1)	24 (2.2)	15 (1.4)	11 (1.0)
4-1/4" x 4-1/4" x 1/4" (108 x 108 x 6 mm)	221 (20.5)	109 (10.1)	72 (6.7)	54 (5.0)	35 (3.3)	26 (2.4)
6" x 6" x 1/4" (150 x 150 x 6 mm)	313 (29.1)	155 (14.4)	103 (9.6)	77 (7.2)	50 (4.7)	37 (3.4)
8" x 8" x 3/8" (200 x 200 x 10 mm)	278 (25.8)	138 (12.8)	91 (8.5)	68 (6.3)	45 (4.2)	33 (3.1)
12" x 12" x 3/8" (300 x 300 x 10 mm)	417 (38.7)	208 (19.3)	138 (12.8)	103 (9.6)	68 (6.3)	50 (4.7)
6" x 24" x 3/8" (150 x 610 x 10 mm)	334 (31.0)	166 (15.4)	110 (10.2)	82 (7.6)	54 (5.0)	40 (3.7)
12" x 24" x 3/8" (300 x 610 x 10 mm)	557 (51.7)	278 (25.8)	184 (17.1)	138 (12.8)	91 (8.5)	68 (6.3)

SikaTile®-825 Epoxy Grout Coverage in sqft. (m^2) per 1 gal. (3.79 L)*				
Tile Size	Grout Joint Width			
	1/16" (1.5 mm)	1/8" (3 mm)	1/4" (6 mm)	3/8" (10 mm)
1" x 1" x 1/4" (25 x 25 x 6 mm)	57 (5.2)	31 (2.8)	18 (1.7)	14 (1.3)
2" x 2" x 1/4" (50 x 50 x 6 mm)	108 (10.0)	57 (5.2)	31 (2.8)	22 (2.0)
4" x 4" x 3/8" (100 x 100 x 10 mm)	211 (19.6)	108 (10.0)	57 (5.2)	40 (3.7)
6" x 6" x 3/8" (150 x 150 x 10 mm)	141 (13.1)	72 (6.7)	38 (3.5)	26 (2.4)
8" x 8" x 3/8" (200 x 200 x 10 mm)	314 (29.2)	160 (14.8)	82 (7.6)	57 (5.2)
12" x 12" x 3/8" (300 x 300 x 10 mm)	278 (25.8)	141 (13.1)	72 (6.7)	49 (4.6)
18" x 18" x 3/8" (150 x 610 x 10 mm)	416 (38.6)	210 (19.5)	107 (9.9)	72 (6.7)
24" x 24" x 3/8" (610 x 610 x 10 mm)	622 (57.8)	313 (29.0)	158 (14.7)	107 (9.9)
6" x 24" x 3/8" (150 x 610 x 10 mm)	334 (31.0)	169 (15.7)	86 (8.0)	59 (5.4)
12" x 24" x 3/8" (300 x 610 x 10 mm)	554 (51.4)	279 (25.9)	141 (13.1)	95 (8.8)

SikaTile®-815 Secure Grout - Coverage in sq. ft. (m^2) per 10 lb. Bag (4.53 kg)*					
Tile Size	Grout Joint Width				
	1/16" (1.5 mm)	1/8" (3 mm)	1/4" (6 mm)	3/8" (10 mm)	1/2" (13 mm)
1" x 1" x 1/4" (25 x 25 x 6 mm)	42 (3.9)	23 (2.1)	14 (1.3)	10 (1.0)	9 (0.8)
2" x 2" x 1/4" (50 x 50 x 6 mm)	81 (7.5)	42 (3.9)	23 (2.1)	17 (1.6)	14 (1.3)
4" x 4" x 3/8" (100 x 100 x 10 mm)	105 (9.8)	54 (5.0)	28 (2.6)	20 (1.9)	16 (1.5)
6" x 6" x 3/8" (150 x 150 x 10 mm)	156 (14.5)	79 (7.3)	41 (3.8)	28 (2.6)	22 (2.0)
8" x 8" x 3/8" (200 x 200 x 10 mm)	207 (19.2)	105 (9.8)	54 (5.0)	37 (3.4)	28 (2.6)
12" x 12" x 3/8" (300 x 300 x 10 mm)	310 (28.8)	156 (14.5)	80 (7.4)	54 (5.0)	41 (3.8)
18" x 18" x 3/8" (150 x 610 x 10 mm)	464 (43.1)	233 (21.6)	119 (11.1)	80 (7.4)	61 (5.7)
24" x 24" x 3/8" (610 x 610 x 10 mm)	618 (57.4)	310 (28.8)	158 (14.7)	106 (9.8)	80 (7.4)
6" x 24" x 3/8" (150 x 610 x 10 mm)	249 (23.1)	126 (11.7)	65 (6.0)	44 (4.1)	34 (3.2)

* Setting Coverage in sq. ft. (m2) per 2 Gallon Unit (7.58 L)		
Trowel Size	3/16" x 1/4" V-Notch	1/4" x 1/4" Square Notch
Coverage	72 (6.7)	44 (4.1)

* Coverage shown is for estimating purposes only. Actual coverage may vary due to installation techniques and actual tile types and sizes used on the job.

Coverages are approximate and may be reduced based on project conditions, actual tile size, waste and other factors.

Reference the SikaTile® Grout Calculator at www.SikaTile.com for other tile sizes and detailed coverage information.

Trowel Charts:


Coverage for: SikaTile®-300 Set, SikaTile®-305 Pro Set, SikaTile®-310 Premium Set, SikaTile®-350 Flex Set, SikaTile®-395 LHT Set, SikaTile®-400 LHT Pro Set, SikaTile®-450 LHT Secure Set, SikaTile®-500 LHT Lite, SikaTile®-550 Titan LHT Set

RECOMMENDED TROWEL SIZE/ TAMAÑO DE LLANA RECOMENDADO		
Tile/Loseta	Trowel/Llana	Coverage/Cobertura
Ceramic/ Cerámica	**1/4" x 1/4" x 1/4"** (6 mm x 6 mm x 6 mm) Square Notch 	65 - 75 ft² per unit. (6.0 - 6.9 m² por bolsa)
Quarry Tile, Rough Stone/ Loseta Industrial, Piedra áspera	**1/4" x 3/8" x 1/4"** (6 mm x 10 mm x 6 mm) Square Notch 	55 - 65 ft² per unit. (5.1 - 6.0 m² por bolsa)
Large Tile, Marble, Stone/ Azulejo Grande, Mármol, Piedra	**1/2" x 1/2" x 1/2"** (12 mm x 12 mm x 12 mm) Square Notch 	35 - 45 ft² per unit. (3.2 - 4.2 m² por bolsa)

Coverage for: SikaTile®-425 LHT Secure Set Rapid

RECOMMENDED TROWEL SIZE/ TAMAÑO DE LLANA RECOMENDADO		
Tile/Loseta	Trowel/Llana	Coverage/Cobertura
Ceramic/ Cerámica	**1/4" x 1/4" x 1/4"** (6 mm x 6 mm x 6 mm) Square Notch 	33 - 38 ft² per unit. (3.0 - 3.5 m² por bolsa)
Quarry Tile, Rough Stone/ Loseta Industrial, Piedra áspera	**1/4" x 3/8" x 1/4"** (6 mm x 10 mm x 6 mm) Square Notch 	28 - 33 ft² per unit. (2.6 - 3.1 m² por bolsa)
Large Tile, Marble, Stone/ Azulejo Grande, Mármol, Piedra	**1/2" x 1/2" x 1/2"** (12 mm x 12 mm x 12 mm) Square Notch 	18 - 23 ft² per unit. (1.6 - 2.1 m² por bolsa)

Coverage for: SikaTile®-475 LHT Premium Set

RECOMMENDED TROWEL SIZE/ TAMAÑO DE LLANA RECOMENDADO		
Tile/Loseta	Trowel/Llana	Coverage/Cobertura
Ceramic/ Cerámica	**1/4" x 1/4" x 1/4"** (6 mm x 6 mm x 6 mm) Square Notch 	100 -110 ft² per unit. (9.4 - 10.4 m² por bolsa)
Quarry Tile, Rough Stone/ Loseta Industrial, Piedra áspera	**1/4" x 3/8" x 1/4"** (6 mm x 10 mm x 6 mm) Square Notch 	85 - 95 ft² per unit. (7.9 - 8.9 m² por bolsa)
Large Tile, Marble, Stone/ Azulejo Grande, Mármol, Piedra	**1/2" x 1/2" x 1/2"** (12 mm x 12 mm x 12 mm) Square Notch 	45 - 55 ft² per unit. (4.3 - 5.3 m² por bolsa)

Product Application Chart

SURFACE PREPERATION

Product	Description	Packaging Size	Concrete	Gypsum	Self Leveler + Patching
SikaLevel®-01 Primer Plus	Primer for Porous Substrates	1- and 5-gal. jugs	■	■	■
SikaLevel®-02 EZ Primer	Primer for Non-Porous Substrates	1-gal. pail	■		
SikaLevel®-125	Durable, Cementitious SLU	50-lb. bags	■*	■*	■*
SikaLevel®-225	High-Strength, Cementitious SLU	55-lb. bags	■*	■*	■*
SikaLevel®-325	High-Strength, Cementitious SLU	55-lb. bags	■*	■*	■*
SikaLevel®-025 Patch	Cement-Based Patching Compound from Feather Edge up to 1/2"	25-lb. bags	■	■*	■
SikaTile®-910 Floor Mud	Pre-Blended Sand and Cement Mortar Mix	50-lb. bags	■	■*	■
SikaTile®-920 Underlay C	Polymer Modified Portland Cement Mortar Bed Underlayment	50-lb. bags	■	■*	■
SikaTile®-925 Underlay RS	Polymer Modified Portland Cement Mortar Bed Underlayment	50-lb. bags	■	■*	■

WATERPROOFING AND CRACK ISOLATION AND SOUND CONTROL

Product	Description	Packaging Size	ANSI	Thickness	Crack Isolation
SikaTile®-100 Moisture Guard	Fast-Drying Elastomeric Waterproof and Crack Isolation Membrane	1 and 3.5 gal. pails	A118.10, A118.12	Refer to PDS	1/8"
SikaTile®-150 Moisture Guard Fabric Membrane	Flexible, Sheet-Applied Waterproofing Membrane	39.4"x16.4' and 39.4"x98.4' rolls	A118.10, A118.12	20 mil	3/8"
SikaTile®-200 Fracture Guard Rapid	Fast Drying Elastomeric Crack Isolation Membrane	1 and 3.5 gal. pails	A118.12	Refer to PDS	1/8"
SikaTile®-225 Fracture Guard PNS	Peel and Stick Crack Isolation Sheet Membrane	225 sqft: 3'x75'	A118.12	40 mil	3/8"
SikaTile®-250 Fracture Guard UCM	Uncoupling, Crack Isolation and Waterproofing Membrane	39.4" x 32.8' and 39.4" x 98.4' rolls	A118.10, A118.12	35 mil	3/8"
SikaTile®-700 Sound Shield PNS	Peel and Stick Sound Control and Crack Isolation Sheet Membrane	100 sqft: 3'x33'	A118.12	90 mil	3/8"

ADHESIVES

Product	Description	Packaging Size	Classification		Concrete or Masonry	Masonry Block with Mortar Joins
			ANSI	ISO		
SikaTile®-300 Set	Standard-Grade Non-Modified Thin Set Mortar	50-lb. bag	A118.1	-	■	■
SikaTile®-300 Set with Sika® Latex R			A118.4, A118.11	-	■	■
SikaTile®-305 Pro Set	Professional-Grade Polymer Modified Thin Set Mortar	50-lb. bag	A118.4, A118.11	-	■	■
SikaTile®-310 Premium Set	Premium-Grade Polymer Modified Thin Set Mortar	50-lb. bag	A118.4, A118.11	-	■	■
SikaTile®-350 Flex Set	Superior-Grade Polymer-Modified Thin Set Mortar	50-lb. bag	A118.15E, A118.4E, A118.11	C2EP1	■	■
SikaTile®-395 LHT Set	Standard-Grade LHT Mortar	50-lb. bag	A118.15E, A118.4E, A118.11	C2EP1	■	■
SikaTile®-400 LHT Pro Set	Professional-Grade Large and Heavy Tile Mortar	50-lb. bag	A118.4	C1	■	■
SikaTile®-425 Secure Set Rapid	Premium-Grade, Rapid-Setting, LHT Mortar	50-lb. bag	A118.4F, A118.11F	C2FP1	■	■
SikaTile®-450 LHT Secure Set	Premium-Grade Large and Heavy Tile Mortar	50-lb. bag	A118.4E, A118.11	C2EP1	■	■
SikaTile®-475 LHT Premium Set	High-Performance Flexible LHT Mortar	50-lb. bag	A118.15ET, A118.4ET, A118.11	C2TES1P1	■	■
SikaTile®-500 LHT Lite	Superior-Grade Lightweight Flexible LHT Mortar	30-lb. bag	A118.15*, A118.4, A118.11	-	■	■
SikaTile®-550 Titan LHT Set	Superior-Grade Lightweight Flexible LHT Mortar	50-lb. bag	A118.15*, A118.4, A118.11	-	■	■
SikaTile®-650 Type 1	Premium Tile Adhesive	3.5 and 1-gal pails	A136.1, Type 1	-	■	■

GROUTS

Product	Description	Packaging Size	Colors	Grout Joints	Water Immersion
SikaTile®-800 Sanded Grout	Premium, Polymer-Modified Portland Cement Sanded Grout	25 lb. bags	18	1/8" - 1/2"	■
SikaTile®-800 Unsanded Grout	Premium, Polymer-Modified Portland Cement Unsanded Grout	10 lb box	18	1/16"-1/8"	■
SikaTile®-815 Secure Grout	High-Performance, Rapid-Setting, Polymer-Modified Grout	10 and 25 lb. bags	18	1/16" - 1/2"	■
SikaTile®-825 Epoxy Grout	Premium, 100%-Solids Epoxy Mortar and Grout	2 gal. kit	12	1/8" - 3/8"	■
SikaTile® Ultima Grout	Professional-Grade Ready-to-Use Grout	1 gal. pail	14	1/16" - 1/2"	

Substrates

Plywood	Quarry Tiles	Vinyl Tile (VCT, LVT, etc.)	*Asphaltic Cutback	*Adhesive Residues	Terrazzo	Radiant Heat	Rubber Underlayment
						■	
■	■	■		■	■	■	■
■*	■*	■*	■*or*	■*or*	■*	■*	■*
■*	■*	■*	■*or*	■*or*	■*	■*	■*
■*	■*	■*	■*or*	■*or*	■*	■*	■*
■	■	■*	■*	■	■	■	■
■*	■*	■*	■*or*	■	■	■	■
■*	■*	■*	■*or*	■	■	■	■
■*	■*	■*	■*or*	■	■	■	■

*Sika® MB & MB EZ Rapid *SikaLevel®-01 Primer Plus *SikaLevel®-02 EZ Primer *Mechanically Prepared *Must have 50% of old material removed

Substrate								Area: Interior		Area:Exterior	
Concrete or Masonry	Cementitious Backer Units	Masonry Block with Mortar Joins	Gypsum Wall Board and Underlayments	Exterior Grade Plywood	Existing Tile, Marble and Terazzo	Existing Vinyl	Cutback Adhesive	Floors	Walls	Floors	Walls
■	■	■	■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■		■	
■	■	■	■	■	■	■	■	■		■	
■	■	■	■	■	■	■	■	■		■	

Substrate						Floor Covering Type					Area: Interior		Area:Exterior	
Cementitious Backer Units	Gypsum Wall Board and Underlayments	Exterior-Grade Plywood	Existing Tile, Marble and Terrazzo	Existing Vinyl	Cutback Adhesive	Ceramic	Porcelain	Glass Tile	Marble and Terrazzo	Stone	Floors	Walls	Floors	Walls
■	■					■				■	■	■	■	■
■	■	■	■	■	■	■	■		■	■	■	■	■	■
■	■	■	■	■	■	■	■		■	■	■	■	■	■
■	■	■	■	■	■	■	■		■	■	■	■	■	■
■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
■	■		■	■		■	■		■	■	■	■	■	■
■	■	■	■	■		■	■	■	■	■	■	■ ■	■	■ ■
■	■	■	■	■		■	■	■	■	■	■	■ ■	■	■ ■
■	■	■	■	■	■	■	■	■	■	■	■	■ ■	■	■ ■
■	■	■	■	■	■	■	■	■	■	■	■	■	■	■ ■
■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■	■	■	■	■		

■ - Recommended ■ ■ - Strongly Recommended

ANSI Classification	Floor Covering Type						Area: Interior		Area:Exterior	
ANSI	Ceramic	Porcelain	Glass Tile	Marble and Terrazzo	Stone	Green Marble	Floors	Walls	Floors	Walls
A118.6	■	■	■	■	■		■	■	■	■
A118.6	■	■	■	■	■		■	■	■	■
A118.7	■	■	■	■	■		■	■	■	■
A118.3	■	■	■	■	■	■	■	■	■	■
-		■	■	■	■		■	■	■	■

SikaTile®

Tile and Stone Installation Products



© Sika Corp

MAKE YOUR FLOOR SIKA SECURE

For more information, contact Sika: Phone: 1-800-933-SIKA (Nationwide), Website: www.SikaTile.com

Our most current General Sales Conditions shall apply. Please consult the Product Data Sheets prior to any use and processing.

SIKA CORPORATION
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

BUILDING TRUST